



Lithium Iron Phosphate ( LiFePO4 ) Battery

LAR1224-LT20-R32

Features

- ✧ Using the technology of lithium iron phosphate cell, superior safety, thousands of cycles, 100%DOD, under normal conditions.
- ✧ Built-in automatic protection for over-charge, over discharge, over current and over temperature.
- ✧ Free of maintenance .
- ✧ Internal cell balancing.
- ✧ Lighter weight: About 40% ~50% of the weight of a comparable lead acid battery.
- ✧ Replacement for lead-acid battery.
- ✧ Wider temperature range:-20C~60C.
- ✧ Support for Series application expansion (up to 51.2V) or four in parallel.



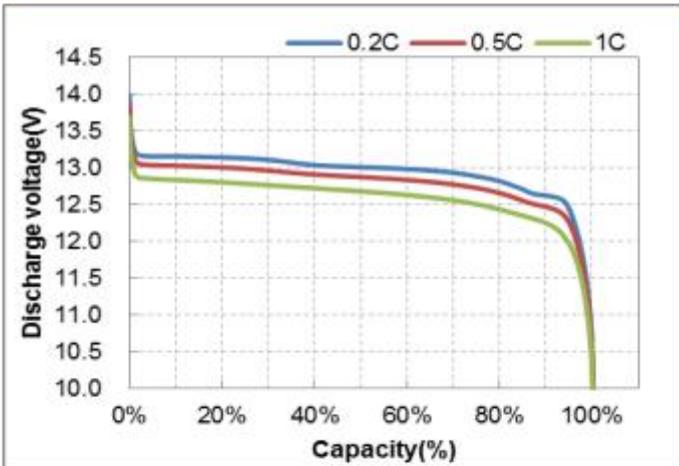
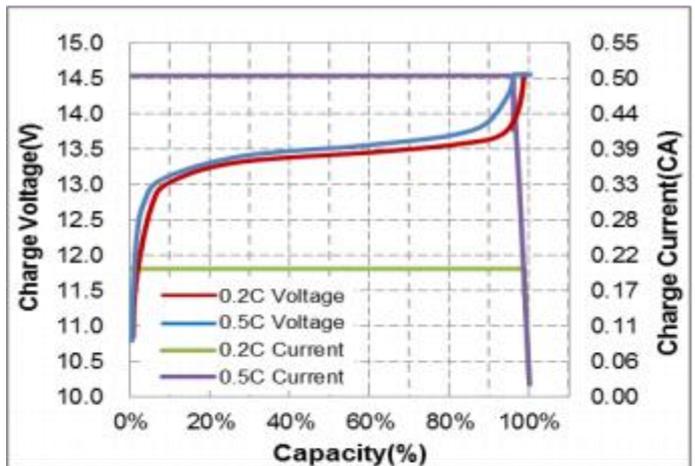
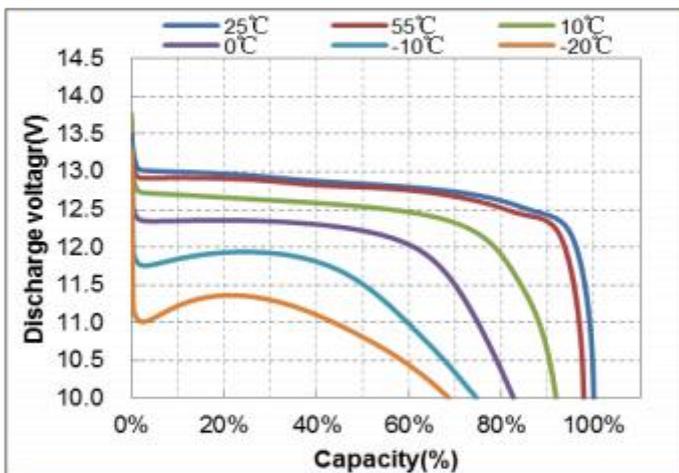
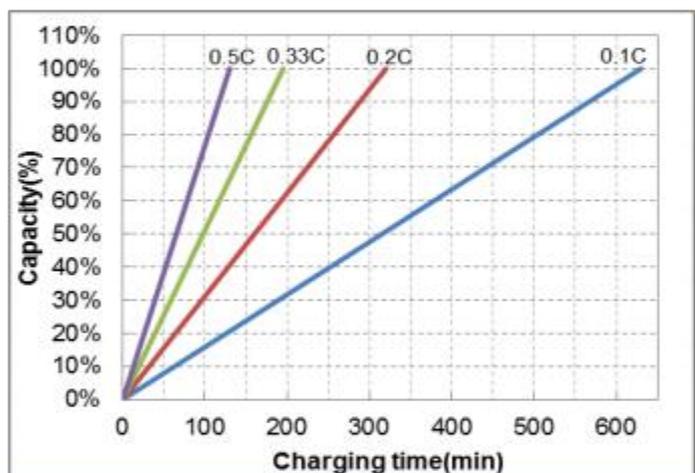
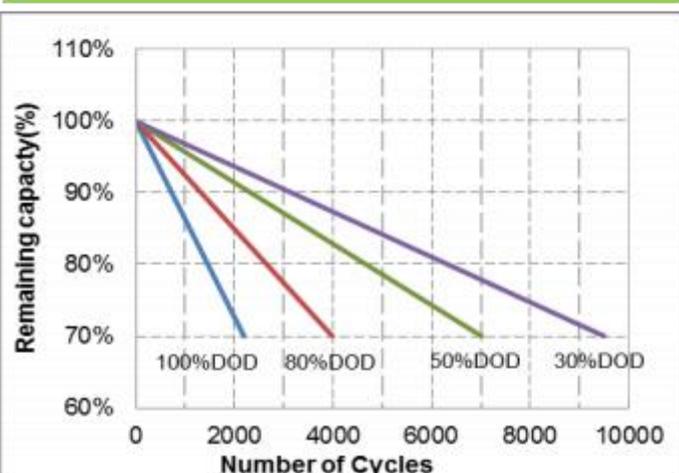
Application

- ✧ UPS
- ✧ Solar & Wind Power System
- ✧ Golf Cart
- ✧ Electric Vehicle , E-bike, E-rickshaw etc.
- ✧ Lighting



General Specifications

Electrical Characteristics	Nominal Voltage	12.8V
	Nominal Capacity	24Ah@0.2C
	Energy	307.2Wh
	Cycle Life	2000 Cycles @ 4.8A Charging/Discharging ,Until 70% Capacity
	Self Discharge	≤3.5% per month at 25C
Standard Charging	Max. Charging Voltage	14.0~14.4V
	Charging Mode	At 0C~45C temperature, charged to 14.4V at a constant current of 4.8A, and then,changed continuously with constant voltage of 14.4V until the current was not more tha4.8A
	Charging Current	4.8A
	Max.Charging Current	12A
Standard Discharging	Discharging Current	4.8A
	Max. Continuous Current	24A
	Discharging Cut-off Voltage	10.0V
Operating Condition	Charge Temperature	0C to 45C(32°F to 113°F) @60±25% Relative Humidity
	Discharge Temperature	-20C to 60C(-4°F to 140°F) @60±25% Relative Humidity
	Storage Temperature	0C to 45C(32°F to 113°F) @60±25% Relative Humidity
	Water Dust Resistance	IP65
Structure	Cell & Format	IFR32700 N60&4S4P
	Casing	Plastic
	Dimension(L*W*H*TH)	181×77×170 ±5%
	Weight	Approx. 3.1Kg
	Terminal	M5

**Lithium Iron Phosphate (LiFePO<sub>4</sub>) Battery**
**LAR1224-LT20-R32**
**Different Rate Discharge Curve @25C**

**Charge Characteristics of capacity-voltage@0.2C&0.5C, 25C**

**Different Temperature Discharge Curve @0.5C**

**Charge Characteristics of time-voltage@ 25C**

**Different DOD Discharge Cycle Life Curve @0.2C,25C**

**Open circuit voltage VS SOC%@25C**
